


## 2 LAYER ANTISTATIC BUBBLE FILM

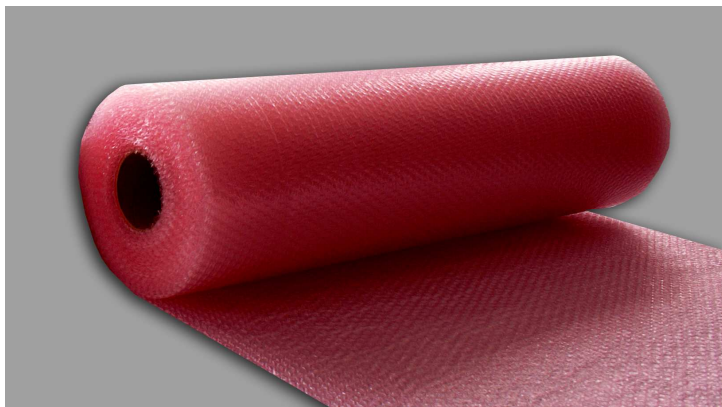

### Technical Data Sheet

Thickness	4.2mm
Density (kg/m <sup>3</sup> )	922
Roll width	max 1.50m
Roll length	max 150m
Color	Pink to slightly red
<b>ESD properties</b>	
Resistance - 10 <sup>10</sup> Ohm	OK
Voltage – Normal conditions (0-15V)	OK
Voltage after charging – in 2 seconds must drop into less than 100 Volts	OK

Antistatic bubble film contains 6% of long lasting antistatic masterbatch AMPACET 150223 Red AS PE MB to eliminate charges in LDPE and LLDPE during processing and end-use applications.

#### Masterbatches physical properties:

Specific Gravity:	0.92
Additive (%):	3-6 (nominal) MDE-08
Melt Index (g/10min):	14 (nominal) ASTM D1238, 190°C/2.16kg
Bulk Density (g/l):	700 (nominal) MDE-66
Light Resistance:	7
Temperature Resistance:	220°C

This product has been especially produced for electronic packaging when specific antistatic properties are required.

Manufacturer: **PEPI RER SIA**  
[www.pepirer.lv](http://www.pepirer.lv)

