


## 2 LAYER AIR BUBBLE FILM

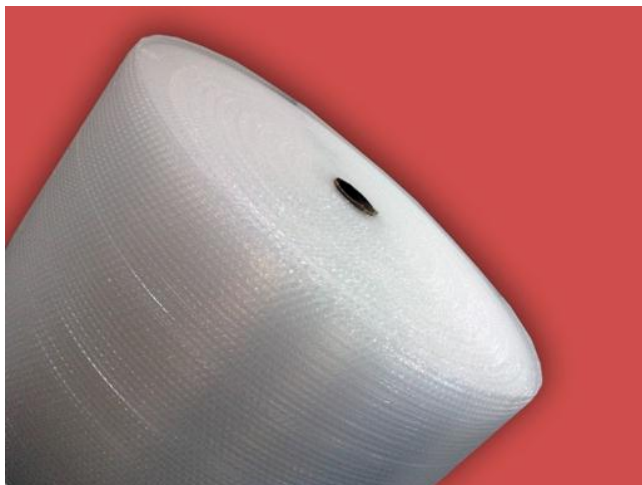

### Technical Data Sheet

Thickness (mm)	4.2
Air bubble diameter (mm)	8
Roll width(mm)	300;400;600;1200;1500; 2000*; 3000*
Roll length(m)	min 10 max 1500
Colour	natural transparent
Working temperature range	-60/+90°C

\* 2000 and 3000mm width available for laminated product (two sheets of standard width welded together by heat).

NOTE: Custom sizes are available on a special order.

Product contains low density polyethylene (LDPE), linear low density polyethylene (LLDPE) and antioxidant.

This product has been produced as a packing material. It is an optimal protective layer of surface against mechanical damage.

Product is Freon free. The usage of product isn't dangerous to humans nor to environment. Product is 100% recyclable.

Manufacturer: **PEPI RER SIA**  
[www.pepirer.lv](http://www.pepirer.lv)